

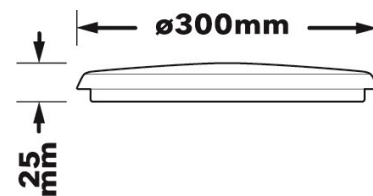
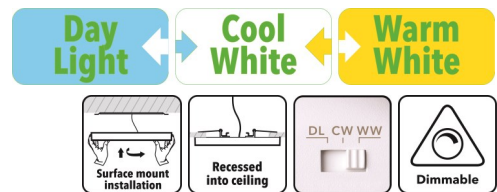
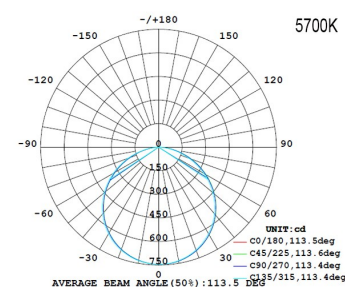


- 3-CCT (3000K/4000K/5700K) selectable
- 22W 2200-2600lm
- Triac dimmable
- Slim design
- Multi-fit supports both recessed and surface mount installation
- 120° beam angle
- Lifetime 40000 hrs

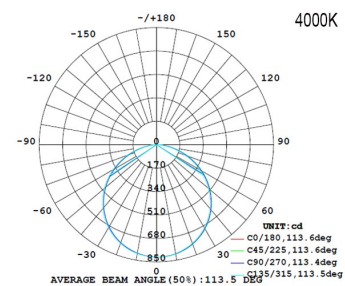


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

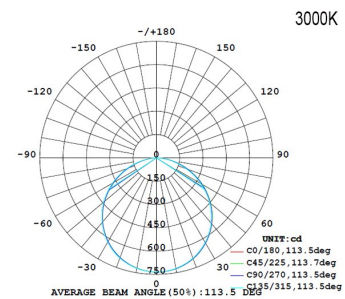

Order Code	66669
General Data	
Lamp Socket	N/A
Design	PC diffuser
Geometric Data	
Height (mm)	25mm
Diameter (mm)	Φ300mm
Cut Hole (mm)	120-260mm*
Weight (g)	780g
Electric Data	
Wattage	22W
Voltage	200-240Vac
Power Factor	0.9
Operating Frequency	50Hz
Photometric Data	
Total Luminous Flux (lm)	2200-2600lm
CRI	>80
CCT	3000K/4000K/5700K – 3-CCT
Luminous Intensity (cd)	N/A
Beam Angle (°)	120°
Lifetime(L70)	>40000 hrs
Operating Temperature	-20-40°C

* For recessed installation



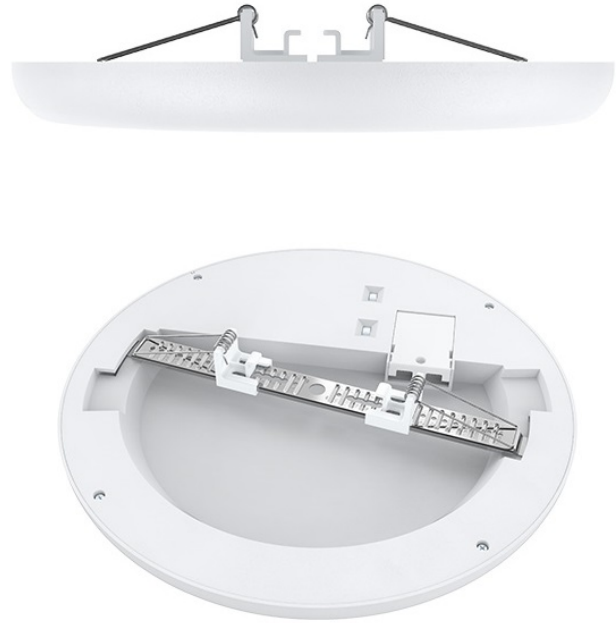

Order Code	66669
Product Description	Verbatim Multi fit LED Ceiling Light 22W 3CCT 300mm 2200-2600lm Dim

Technical Packaging Details

Giftbox Barcode	4895117966693
Inner Carton Barcode	TBC
Outer Carton Barcode	24895117966697
Pack Dimensions (LxWxH)	315x42x345mm
Pack Weight	950g
Carton Qty (Shipping Unit)	10
Carton Dimensions (LxWxH)	445x330x365mm
Cartons/Layer	9
Layers/Pallet	2
Units/Pallet	180