






- 3-CCT (3000K/4000K/5700K) selectable
- 16W 1400-1700lm
- Triac dimmable
- Slim design
- Multi-fit supports both recessed and surface mount installation
- 120° beam angle
- Lifetime 40000 hrs

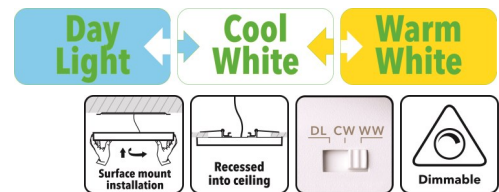

Order Code	66670
General Data	
Lamp Socket	N/A
Design	PC diffuser
Geometric Data	
Height (mm)	22mm
Diameter (mm)	Φ235mm
Cut Hole (mm)	65-205mm*
Weight (g)	460g
Electric Data	
Wattage	16W
Voltage	200-240Vac
Power Factor	0.9
Operating Frequency	50Hz
Photometric Data	
Total Luminous Flux (lm)	1400-1700lm
CRI	>80
CCT	3000K/4000K/5700K – 3-CCT
Luminous Intensity (cd)	N/A
Beam Angle (°)	120°
Lifetime(L70)	>40000 hrs
Operating Temperature	-20-40°C

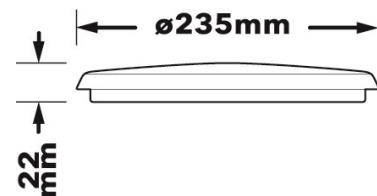

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

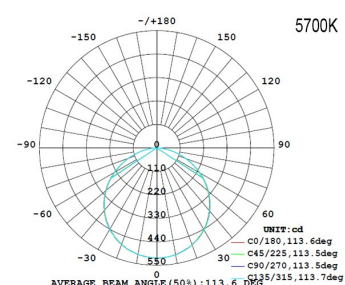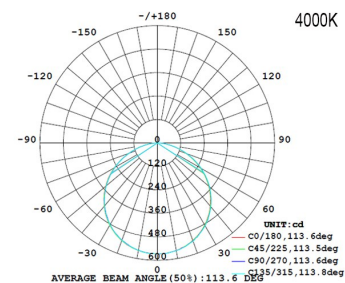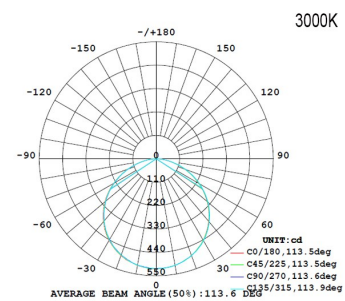

* For recessed installation





Order Code	66670
Product Description	Verbatim Multi fit LED Ceiling Light 16W 3CCT 235mm 1400-1700lm Dim

Technical Packaging Details

Giftbox Barcode	4895117966709
Inner Carton Barcode	TBC
Outer Carton Barcode	24895117966703
Pack Dimensions (LxWxH)	245X38X275mm
Pack Weight	620g
Carton Qty (Shipping Unit)	20
Carton Dimensions (LxWxH)	405x260x570mm
Cartons/Layer	12
Layers/Pallet	2
Units/Pallet	480