

12SB120CL-FR (12V 120Ah)

SPECIFICATIONS

Nominal Voltage (V) 12V

Nominal Capacity

20 hour rate (6.02A to 9.90V)	120.4Ah
10 hour rate (11.6A to 9.90V)	116.0Ah
5 hour rate (20.1A to 9.60V)	100.5Ah
1 hour rate (66.7A to 9.60V)	66.7Ah

Weight Approx. 32.5kg (71.5lbs)

Internal Resistance (@1kHz) Approx. 5mΩ

Maximum Discharge Current

For 5 seconds 1200A

Charging Methods @25°C (77°F)

Cycle Use:

Charging Voltage	14.4V to 15.0V
Coefficient -5.0mV/°C/Cell	
Maximum Charging Current	33A

Standby Use:

Float Charging Voltage	13.50V to 13.80V
Coefficient -3.0mV/°C/Cell	

Design Life 12 years

Operating Temperature Range

Charge	-15°C (5°F)	to	+40°C (104°F)
Discharge	-15°C (5°F)	to	+50°C (122°F)
Storage	-15°C (5°F)	to	+40°C (104°F)

Charge Retention (Shelf Life) @20°C (68°F)

1 month	98%
3 months	94%
6 months	85%



Case Material UL94-V0 Flame Retardant

Terminal F8




DIMENSIONS


mm (inch)

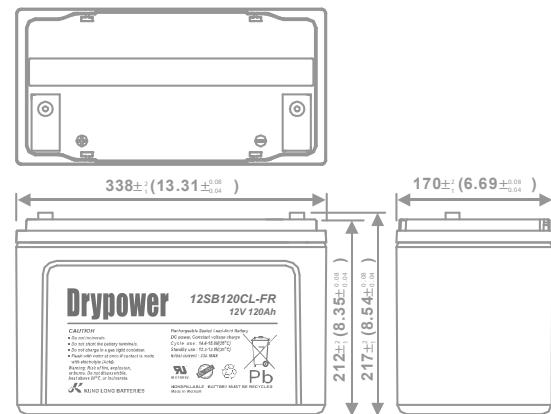


(V) FOR 12V BATTERY Discharge Time VS. Discharge Current (25°C)

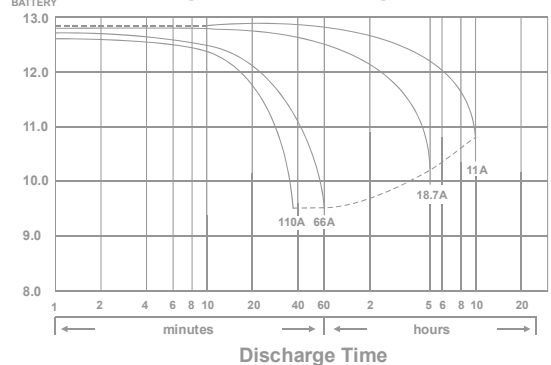


Effect of Temperature on Capacity 25°C (77°F)

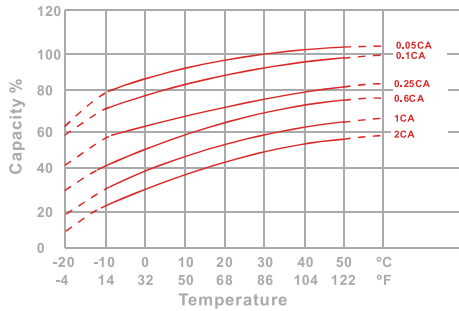


Capacity Retention Characteristic

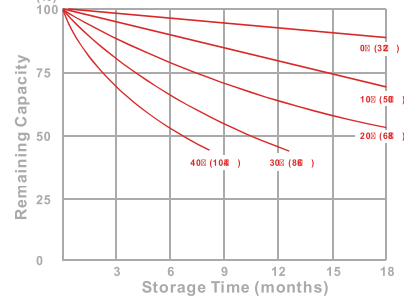

Trickle (or float) Service Life



Cycle Service Life

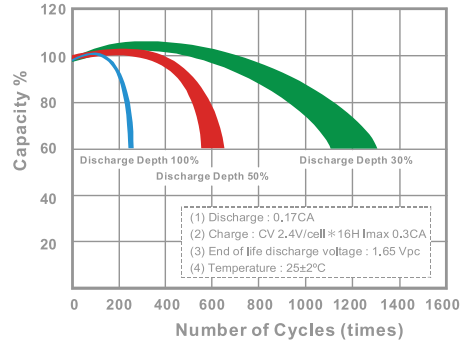

- PERFORMANCE DATA

Discharge Rates in Watts to Various End Voltages at 25°C (77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	2880	3202	3423	3634	3731	3833	4025
10	min	2145	2339	2498	2650	2715	2789	2920
15	min	1757	1904	2016	2124	2168	2229	2314
30	min	1075	1139	1193	1243	1265	1291	1332
60	min	711	738	756	773	780	789	800
120	min	414	435	450	459	465	472	481
180	min	301	317	328	339	343	348	355
240	min	240	253	265	277	281	286	292
300	min	211	225	235	240	243	245	249
600	min	136	139	141	144	145	146	148
1200	min	70.3	72.2	74.2	75.5	76.0	76.6	77.4

- Discharge Rates in Amperes to Various End Voltages at 25°C (77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
Time								
5	min	214	279	317	348	358	370	387
10	min	167	196	217	234	242	251	265
15	min	124	151	170	184	189	195	203
30	min	74.3	86.7	95.1	104	106	109	114
60	min	44.4	52.6	58.3	62.4	63.3	64.8	66.7
120	min	25.1	29.2	32.4	35.5	36.3	37.2	38.4
180	min	21.5	23.9	25.7	27.2	27.7	28.3	29.1
240	min	18.5	20.3	21.6	22.5	22.8	23.2	23.7
300	min	16.8	18.0	18.9	19.4	19.6	19.8	20.1
600	min	10.7	11.0	11.2	11.4	11.5	11.6	11.8
1200	min	5.45	5.62	5.79	5.91	5.96	6.02	6.09

All data on the spec. sheet is an average value:

The tolerance range : X<6min(+15%~-15%), 6min ≤ X<10min(+12%~-12%), 10min ≤ X < 60min(+8%~-8%), X ≥ 60min(+5%~-5%)

Performance may vary depending on application. All specifications are correct at time of creation. All specifications and operation conditions contained in this datasheet are subject to change or improvement without prior notice to the user. This data is for evaluation purposes only. No guarantee is intended or implied by this data. For clarification and updated information, please contact us.