


Dimensions

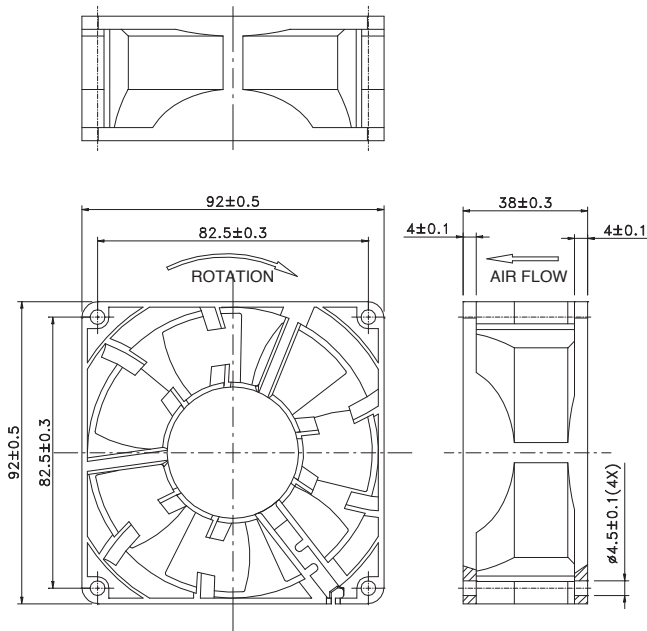


Air exhaust over struts. Rotational direction CCW looking at rotor.

Brushless DC Motor	Bearing Type
Weight: 150g	Ceramic
Impedance protected	
Lead wire UL 1007 AWG 24	

* All fans are with electronic protection against reverse polarity. The fan only operates when the polarity is correct.

Performance Curves

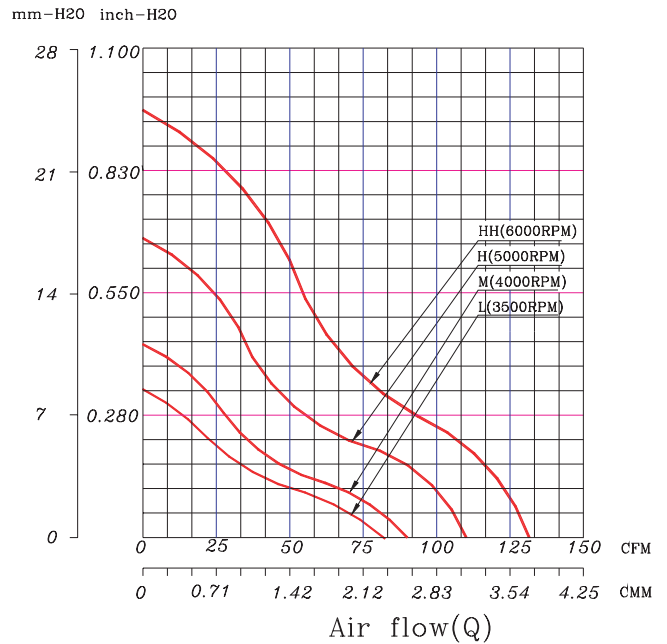

Function Options	
<input type="checkbox"/> Frequency Generator	<input type="checkbox"/> Auto Restart
<input type="checkbox"/> Temperature Control	<input type="checkbox"/> Rotation Detection

* Please contact us for PWM function availability.

* Please contact us for IP55 availability.

* Safety Approval: CE, UL, TUV

Specifications

Model	Rated Voltage (VDC)	Rated Current (Amp)	Input Power (Watts)	Nominal Speed (RPM)	Airflow (CFM)	Static Pressure (inch -H2O)	Noise Level (dBA)
FAN9238C12HH	12	1.95	23.40	6000	133.00	0.95	57.00
FAN9238C12H	12	1.45	17.40	5000	112.60	0.67	51.00
FAN9238C12M	12	0.85	10.20	4000	93.30	0.43	44.00
FAN9238C12L	12	0.70	8.40	3500	81.60	0.33	38.50
FAN9238C24HH	24	1.55	37.20	6000	133.00	0.95	57.00
FAN9238C24H	24	1.00	24.00	5000	112.60	0.67	51.00
FAN9238C24M	24	0.75	18.00	4000	93.30	0.43	44.00
FAN9238C24L	24	0.65	15.60	3500	81.60	0.33	38.50

* Specifications are subject to change without prior notice.

* Check with your distributor for models available.