




Small footprint, huge detail.

Professional Series: Fixed lens bullets available in 2.0MP

High performance fixed-lens surveillance in a compact body. Each bullet in this series offers professional features to take your surveillance to the next level, including true WDR, efficient H.265 compression and face detection.

- Stream up to 2.0MP (1920 x 1080, 16:9 ratio) at 25fps
- H.265 encoding for efficient storage & streaming
- 40m infrared range; true day/night (auto ICR)
- MicroSD slot for recording at the edge up to 128GB
- Back/highlight compensation & true WDR (120dB)
- 3D digital noise reduction & auto white balance
- IP67 weather rated metal housing for outdoor use
- ONVIF, PSIA and CGI compliance

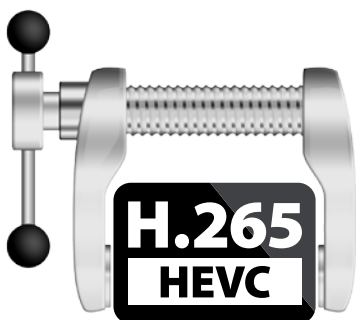

Efficient Video Storage & Streaming



Record at and Beyond Ultra HD



Edge Recording via MicroSD

Series Specifications

Model		CAM367	
Camera	Image Sensor	1/2.8" 2.0MP Progressive Scan CMOS	
	Effective Pixels	1920 (H) x 1080 (V)	
	RAM / ROM	256M / 32MB	
	Min Illumination	0.009 Lux/F2.0 (Color), 0 Lux/F2.0 (IR on)	
	S/N Ratio	> 50dB	
	Infrared System	2 x Infrared LED, 40m range, Auto/manual on/off control	
Lens	Lens / Iris	3.6mm F2.0 Fixed Lens	
	Field of View	Horizontal: 87°, Vertical: 48°	
	Focus	Fixed	
Video	Resolution	1080p (1920 x 1080) to CIF (352 x 288)	
	Frame Rate	Main	1080p (1 ~ 25fps)
		Sub	D1 (1 ~ 50fps)
		Third	1080p (1~25fps)
	Video Compression	H.265 / H.264	
	Bit Rate	H.265: 14 ~ 5632Kbps / H.264: 24 ~ 9472Kbps	
	Bit Rate Control	Constant bit rate (CBR) / Variable bit rate (VBR)	
	Day/Night	Auto (ICR) / Color / B&W	
	Lighting Compensation	BLC / HLC / WDR (120dB)	
	White Balance	Auto / Natural / Street Lamp / Outdoor / Manual	
	Gain Control	Auto / Manual	
Noise Reduction	3D DNR		
Picture Control	Mirror / Flip (0°, 90°, 180°, 270°)		
IVS	Intelligent Functions	Face Detection, Motion Detection (4 zones), Region of Interest (4 zones), Privacy Masking (4 zones), Smart Infrared	
Network	Ethernet	RJ-45 (10/100Base-T)	
	Protocol	HTTP; HTTPS; TCP; ARP; RTSP; RTP; UDP; SMTP; FTP; DHCP; DNS; DDNS; PPPoE; IPv4/v6; QoS; UPnP; NTP; Bonjour; 802.1x; Multicast; ICMP; IGMP; SNMP	
	Streaming Method	Unicast / Multicast	
	Max. User Access	10 Users / 20 Users	
Interface	Video Interface	N/A	
	Audio Interface	N/A	
	Alarm Interface	N/A	
	RS485	N/A	
	Edge Storage	MicroSD Card (up to 128GB) / NAS / Local PC	
	Interoperability	ONVIF / PSIA / CGI	
Environmental	Power Supply	12VDC / PoE (802.3af) (Class 0)	
	Power Consumption	<6W	
	Operating Conditions	-30° ~ +60° C / Less than 95% RH	
	Ingress Protection	IP67	
	Vandal Resistance	N/A	
	Housing	Metal	
	Pan/Tilt/Rotation	Pan: 0° ~360°; Tilt: 0° ~90°; Rotation: 0° ~360°	
	Dimensions	180mm x 70mm x 70mm	
Net Weight	0.41kg		
Application	Diagrams		
	Accessories		
Models	Junction Box (MB1036)	Pole Mount (MB1036 + MB1027)	Corner Mount (MB1036 + MB1026)