



# Discreet HD surveillance.


## Pinhole Series: Covert, small profile cameras available in 2.0MP

Designed for discreet surveillance applications, Pinhole Series cameras are ideal for monitoring controlled ingress points, in-shelf surveillance, vehicles and more. Two compact camera styles allow for surveillance in difficult locations.

- Stream up to Full HD/2.0MP (1920 x 1080) at 25fps
- 3.6mm (92°) pinhole and 2.8mm (101°) PIR models
- Up to 700m video transmission over coaxial cable
- Discreet pinhole or motion sensor appearance
- Dual BNC outputs for HD and composite video
- True wide dynamic range (120dB) (VSCVI2MPPH3.6)
- Auto digital day/night & 2D digital noise reduction
- Includes brackets for wall mounting



**Up to 5x Image Resolution vs D1**

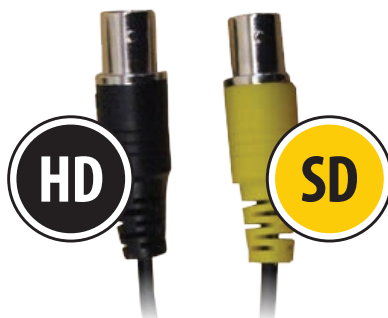

**Dedicated HD / SD Outputs**



**Pet Immune PIR Motion Sensor**

Model	CAM636	CAM635
Product Image		
Image Sensor	1/2.8" 2.0 Megapixel CMOS	1/2.9" 2.0 Megapixel CMOS
Effective Pixels	1937 (H) x 1097 (V)	1920 (H) x 1080 (V)
Signal Noise Ratio	> 65dB	
Lens	3.6mm F2.4 Fixed Lens	2.8mm F2.0 Fixed Lens
Angle of View	92°	101°
Focus	Fixed / 0.6m Min. Focus Distance	Fixed / 0.5m Min. Focus Distance
Minimum Illumination	0.05 Lux at F2.4 (Colour) / 0.005 Lux at F2.4 (B&W)	0.02 Lux at F2.0 (Colour) / 0.002 Lux at F2.0 (B&W)
Electronic Shutter	1/4 ~ 1/100,000s	1/25 ~ 1/100,000s
Day/Night	Auto (ICR) / Manual	
Infrared Range	N/A	
White Balance	Auto / Manual	
Noise Reduction	2D / 3D	2D
Gain Control	Auto	
Lighting Compensation	BLC / HLC / WDR (120dB)	BLC / HLC / DWDR
Type	N/A	Passive Infrared
Range	N/A	12 x 12m (100°)
Pet Immunity	N/A	≤18kg
Resistance Light	N/A	6500Lux
Resolution	1080p (1920 x 1080) to CIF (352 x 288)	
Frame Rate	25fps (1080p and lower)	
Transmission Distance	Rated for up to 700m via 75-3 coaxial cable (performed in ideal test conditions)	
Audio Input	N/A	
Alarm Interface	N/A	
Video Output	2 x BNC video output (1 x HDCVI / 1 x Composite SD)	
Synchronisation	Internal	
OSD Menu	Support	
Ingress Protection	N/A	
Vandal Resistant	N/A	
Housing	Metal	Plastic
Power Input	12VDC	
Power Consumption	< 1.2W	< 0.7W
Dimensions	35.5 x 30 x 22mm	120 x 62 x 58mm
Weight	0.09kg	0.13kg
Operating Environment	-30° to 60°C / RH90% (max)	
Diagram		

Installation height: 2.2 - 2.5m with supplied wall mount bracket

Your local Securview™ HDCVI solutions professional: