

Compact 4 Channel Network Recorder (Built-in PoE)

Model: NVR4ENT3




Product Overview

NVR4ENT3 is a compact network video recorder with a built-in 4 port power over Ethernet switch, allowing easy plug and play installation. The NVR features H.264 compression and continuous recording where old footage is overwritten when the hard drive is full. The NVR also includes motion detection recording, record scheduling and network feed access.

This NVR offers a comprehensive range of remote view options so you may monitor your premises on the go. You can connect to your Watchguard™ CCTV system via local and network PC; through applications available for iOS and Android operating devices; and for Windows Phone smartphones.

Specifications		
System	Main Processor	Dual-core embedded processor
	Operating System	Embedded Linux
	Video Input	4 channel
	Audio Input	Camera dependant
Display	Audio Output	Camera dependant
	Video Output	1 HDMI / 1 VGA
	Resolution	1920 × 1080, 1280 × 1024, 1280 × 720, 1024 × 768
	Display Split	1/4
Recording	OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording
	Video/Audio Compression	H.264 / MJPEG
	Resolution	5MP(2560×1920) / 3MP(2048×1536) / 1080P(1920×1080) / 720P(1280×720) / D1 (704×576/704×480)
	Record Rate	80Mbps
	Bit Rate	48~ 8192kbps
	Record Modes	Manual / Schedule (Regular [Continuous], MD, Alarm) / Stop
	Record Interval	1~120 min (default: 60 min) / Pre: 1~30s / Post: 10~300s
Detection	Alarm Input	N/A
	Alarm Output	N/A
	Trigger Events	Recording, PTZ, Tour, Alarm, Video Push, Email, FTP, Buzzer & Screen tips
	Video Detection	Motion Detection, MD Zones: 396(22× 18), Video Loss & Camera Blank
Playback & Backup	Sync Playback	1/4
	Search Modes	Time/Date, Alarm, MD & Exact search (accurate to second), Smart search
	Backup Modes	USB Device/Network
Network	Ethernet	1 RJ-45 port (10/100Mbps)
	Network Functions	HTTP, TCP/IP, IPv4/IPv6, UPNP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPOE, DDNS, FTP, Alarm Server, IP Search(Support VIP Vision IP camera, DVR, NVS and etc.)
	Max. User Access	128 users
	Remote View	iOS (iPhone, iPad); Android devices, Windows Phone
Storage	Internal HDD	1 SATA ports, up to 4TB
Auxiliary	USB Interface	2 ports (2 Rear USB2.0)
	RS232	N/A
	RS485	N/A
General	Power Supply	DC48V/1.5A
	Power Consumption	NVR: 10W(without HDD), PoE: Max 25.5W for single port
	Operating Environment	-10 ~+55°C / 10~90%RH / 86~106kpa
	Dimensions	Smart 1U, 205mm× 205mm× 45mm
	Weight	0.5kg (without HDD)

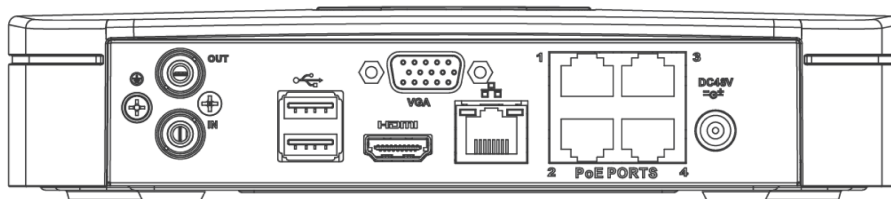

Your Watchguard Surveillance dealer: