





RS270P-8A

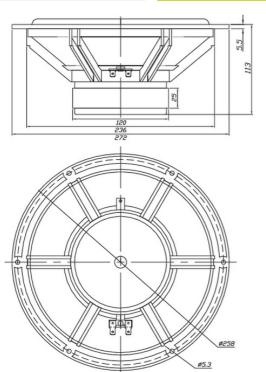


| F | Αī | ΓU | R | ES |
|---|----|----|---|----|

- Three-part paper composite diaphragm featuring paper, Kevlar, and glass fibers
- Low-distortion high-excursion motor system with two shortcircuit paths
- Similar cosmetics and design features as original aluminum Dayton Audio Reference Series
- Perfect for use a woofer, midwoofer, or dedicated midrange driver
- 87.5 dB sensitivity and 6 mm of excursion

| PARAMETE                    | RS                    |
|-----------------------------|-----------------------|
| Impedance                   | 8 ohms                |
| Re                          | 6.8 ohms              |
| Le                          | 0.88 mH               |
| Fs                          | 22.9 Hz               |
| Qms                         | 1.33                  |
| Qes                         | 0.42                  |
| Qts                         | 0.32                  |
| Mms                         | 73.2g                 |
| Cms                         | 0.66 mm/N             |
| Sd                          | 346.4 cm <sup>2</sup> |
| Vd                          | 207.8 cm <sup>3</sup> |
| BL                          | 13.0 Tm               |
| Vas                         | 110.5 liters          |
| Xmax                        | 6.0 mm                |
| VC Diameter                 | 2"                    |
| SPL                         | 87.5 dB @ 2.83V/1m    |
| RMS Power Handling          | 100 watts             |
| Usable Frequency Range (Hz) | 23 - 6,000 Hz         |

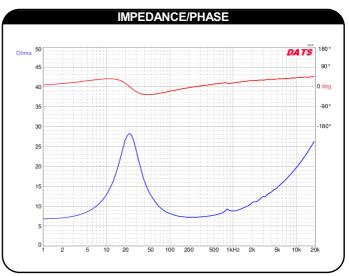

Black = 0° Red = 15° Green = 30° Blue = 45°

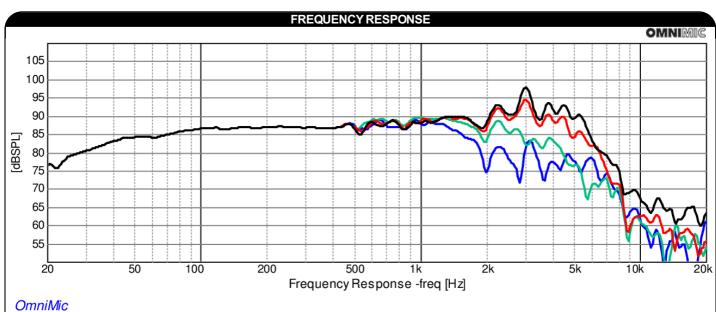

 $\textbf{Note:}\ 1/24^{th}\ \text{octave smoothing - nearfield response included in graph below 450 Hz}.$