




- Perfect for replacing traditional 58W 1500mm T8 fluorescent tube
- No re-wiring needed for T8 fluorescent tube fixtures with starter and choke/coil ballast (CCG type T8 fluorescent)
- Single end power supply
- Shatter proof
- 66% power saving over T8 fluorescent tube
- >100lm/W
- LED starter included as a set
- UV- and IR-free light for less heat and protection for heat sensitive objects



Order Code	66213
<b>General Data</b>	
Lamp Socket	G13
Design	Double sheath shatter proof diffuser , Plastic over glass
<b>Geometric Data</b>	
Length (mm)	1500mm
Diameter (mm)	25mm
Weight (g)	221g
<b>Electric Data</b>	
Wattage	20 W
Voltage	100-240 V AC
Power Factor	≥0.9
Operating Frequency	50/60 Hz
<b>Photometric Data</b>	
Luminous Flux (lm)	2100lm
CRI	≥80
CCT	4000 K – Cool White
Luminous Intensity (cd)	420Cd
Beam Angle (°)	220°
Lifetime	30,000 hrs
<b>Equivalent to (W)</b>	58 W

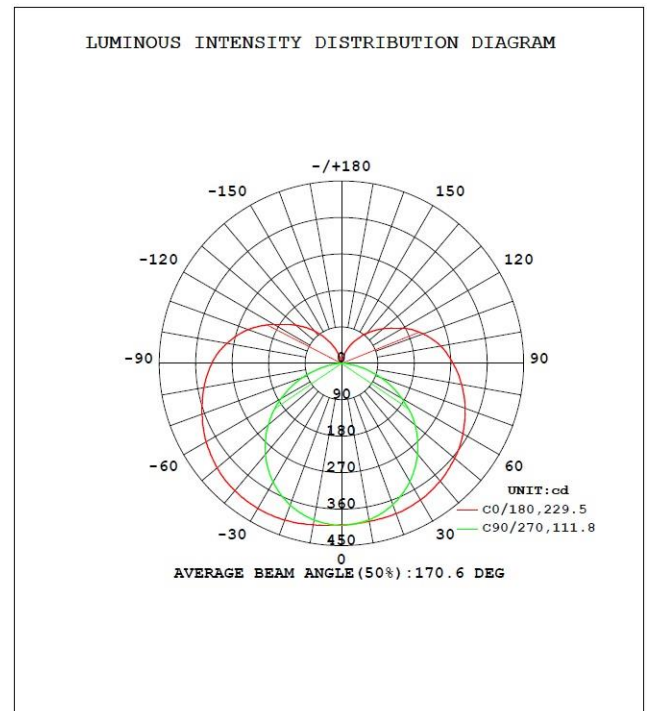

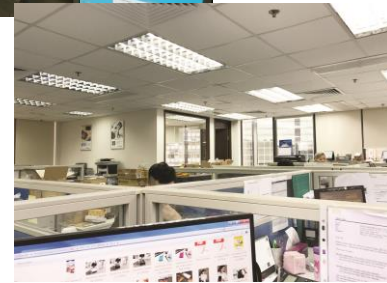

**Order Code**

65213

**Product Description**

Verbatim LED CCG T8 20W 1500mm 2100lm 100-240V 4000K Cool White with LED starter (PF0.9 PC Cap Protective sleeve over glass)

**Technical Packaging Details**

Giftbox Barcode 6943760262131

Inner Carton Barcode

Outer Carton Barcode 26943760262135

Pack Dimensions (LxWxH) 1589mm x 33mm x 33mm

Pack Weight TBC

Carton Qty (Shipping Unit) 25

Carton Dimensions (LxWxH) 1640mm x 185mm x 95mm

Cartons/Layer TBC

Layers/Pallet TBC

Units/Pallet TBC