



# 41" LCR SPEAKER BAR

Model: BS41 User Manual

#### Warranty Information

Dayton Audio products are warranted free from defects in material and workmanship for **5 years** from date of purchase (see exceptions below). In the rare case of a product failure, please contact your place of purchase or call our Customer Support Department at (937) 743-8248.

#### Warranty Limitations

There are no other warranties, either express or implied, that extend the foregoing, and there are no warranties of merchantability or fitness for any particular purpose. Dayton Audio is not responsible for any consequential or incidental damage to any other unit or component or the cost for installation or extraction of any component of the audio system, or for the improper use of products. This includes but is not limited to burnt voice coils, overheating, bent frames, holes in the cone, or broken lead wires. Warranty does not apply to misuse, abuse, neglect, accident, improper use, etc. Dayton Audio reserves the right to repair or replace the products with either a new or factory refurbished unit.

**Exception:** Dayton Audio HDMI Cables -- No registration, no questions asked LIFETIME warranty. Replacement of Dayton Audio HDMI cables is with equal or better quality HDMI cables. Unassembled Kits - A 45-day return policy applies to unassembled kits. Once assembly has been started or completed, kits are deemed used and are nonreturnable for refund/exchange. This does not limit the manufacturers' warranty policies on any kit component.

This warranty gives you specific legal rights and you may also have other rights that vary from state to state.

**Non-Warranty Service:** If non-warranty service is required, the product may be sent to the Company for repair/replacement, transportation prepaid, by calling (937) 743-8248 for details, complete instructions, and service fee charges.



daytonaudio.com  
tel + 937.743.8248  
info@daytonaudio.com

705 Pleasant Valley Dr.  
Springboro, OH 45066  
USA



Thank you for purchasing the Dayton Audio® BS41 LCR (Left, Center, Right) Speaker Bar. This small-but-mighty speaker bar combines left, center and right channel speakers into a single convenient mountable bar that can be positioned above or below a wall mounted flat panel display or sit free-standing. When combined with a pair of Dayton Audio SAT-BK satellite speakers and a powered sub, like the Dayton Audio SUB-800, you'll have created a big sound, compact-sized surround sound experience that will impress family and friends.

### Key Features


The BS41 uses long excursion 4" woofers with long-lasting butyl surrounds for wide dynamic range and exceptional bass. Three mylar dome tweeters provide smooth and extended high frequency response. Easy installation. Packed with a pair of rubber feet for table top mounting.

### Specifications:

- Three 4" woofers with butyl rubber surrounds
- Three 5/8" mylar dome tweeters
- Sub Crossover setting: 80 Hz
- Optional Setting: No sub (if no sub used)
- Power handling: 100 watts RMS
- Impedance: 8 ohms
- Frequency response: 50 - 22,000 Hz
- SPL: 87 dB 1W/1m
- Dimensions: 5" H x 41" W x 3.8" D
- Weight: 17 lbs.

### Typical wiring of the BS41 LCR speaker bar

Fig. A

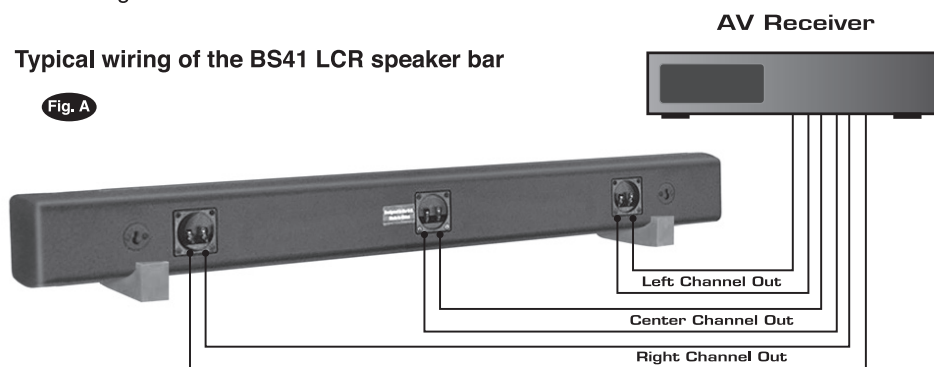

### Tabletop mounting of BS41 LCR speaker bar


Fig. B




### Optional wall mounting of BS41 LCR speaker bar using bracket mounting system (available separately)

**Step 1:** Attach small bracket by pre-drilling pilot hole positions as shown using supplied screws.

#### Rear of BS41

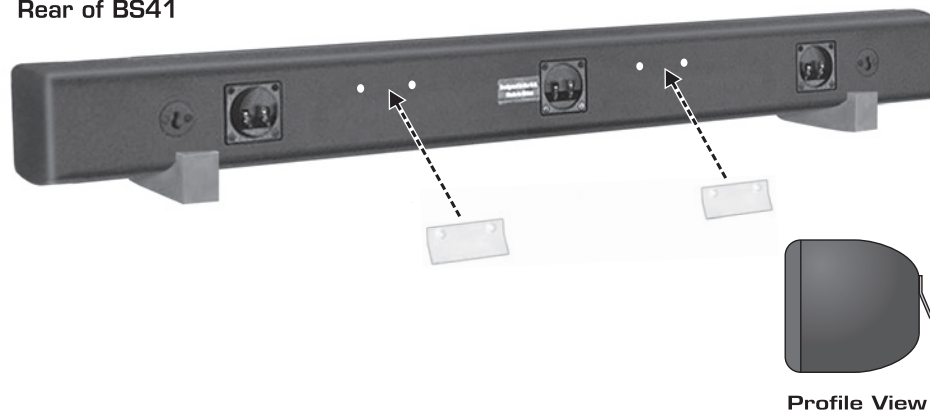

**Step 2:** Identify mounting location and attach wall bracket to the wall using supplied drywall screws. **Do not use nails.** Attach one end first then pivot until bubble is level. Mark holes and install remaining screws. When using the supplied "Wall Dog" screws it is not necessary to locate a wall stud.

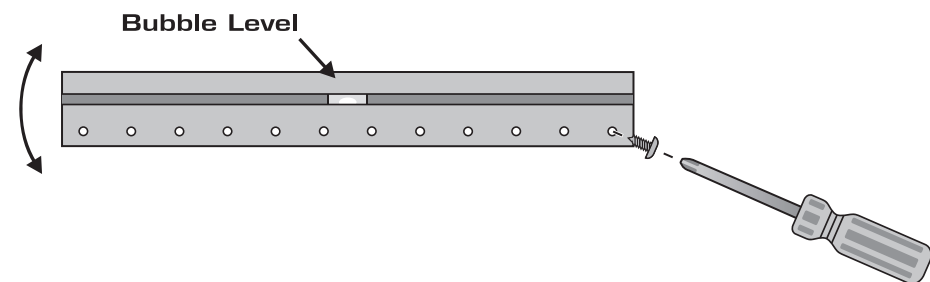

**Step 4:** Attach speaker wires as shown in Figure A.

**Step 5:** Remove bubble level and hang BS41 on wall bracket. BS41 can be moved side-to-side for precise positioning.