




- Compliant to Australia Electrical Equipment Safety System Compliance Level III
- Perfect for replacing traditional 36W 1200mm T8 fluorescent tube
- No re-wiring needed for T8 fluorescent tube fixtures with starter and choke/coil ballast (CCG type T8 fluorescent)
- Single end power supply
- 50% power saving over T8 fluorescent tube
- Flickering-free
- LED starter included as a set
- UV- and IR-free light for less heat and protection for heat sensitive objects



|                          |   |
|--------------------------|---|
| Order Code               | 66207   |
| <b>General Data</b>      |   |
| Lamp Socket              | G13   |
| Design                   | Double sheath shatter proof diffuser , Plastic over glass |
| <b>Geometric Data</b>    |   |
| Length (mm)              | 1198mm  |
| Diameter (mm)            | 27.5mm  |
| Weight (g)               | 215g  |
| <b>Electric Data</b>     |   |
| Wattage                  | 18 W  |
| Voltage                  | 100-240 V AC  |
| Power Factor             | ≥0.9  |
| Operating Frequency      | 50/60 Hz  |
| <b>Photometric Data</b>  |   |
| Luminous Flux (lm)       | 1800  |
| CRI                      | ≥80   |
| CCT                      | 4000 K – Cool White                                       |
| Luminous Intensity (cd)  | 360Cd   |
| Beam Angle (°)           | 200°  |
| Lifetime                 | 30,000 hrs  |
| <b>Equivalent to (W)</b> | 36 W  |

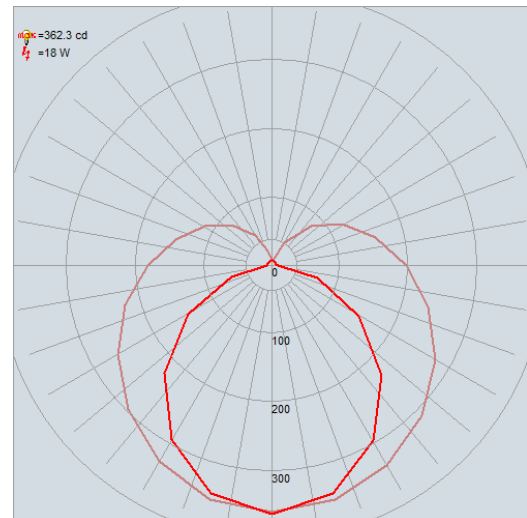

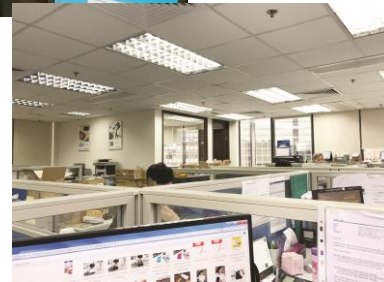

**Order Code**

66207

**Product Description**

Verbatim LED CCG T8 18W 1200mm 4000K Cool White  
1800lm with LED starter (AU version)

**Technical Packaging Details**

|                            |                       |
|----------------------------|-----------------------|
| Inner Carton Barcode       | 16943760257837        |
| Outer Carton Barcode       | 26943760257834        |
| Pack Dimensions (LxWxH)    | 1289mm x 33mm x 33mm  |
| Pack Weight                | 300g                  |
| Carton Qty (Shipping Unit) | 10                    |
| Carton Dimensions (LxWxH)  | 1335mm x 180mm x 90mm |
| Cartons/Layer              | 5                     |
| Layers/Pallet              | 10                    |
| Units/Pallet               | 500                   |