
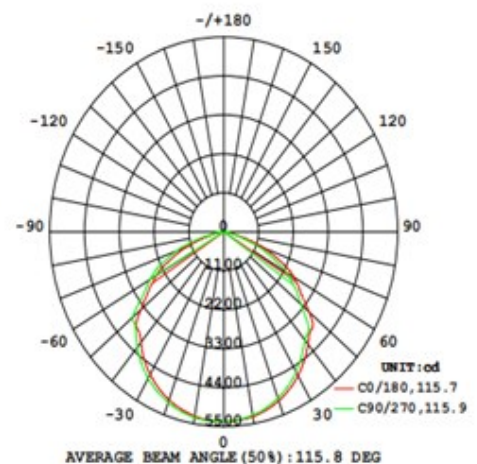


- 100W; 15000lm
- 150lm/W
- 110° beam angle
- Separate chamber for LED driver for better dissipation
- Dimmable (1-10V)
- -20°C to 45°C operating temperature
- IP65 waterproof
- IK10 impact protection
- Easy to install remote control microwave sensor (Sold Separately)
- L70 LED Lifetime >54000hrs

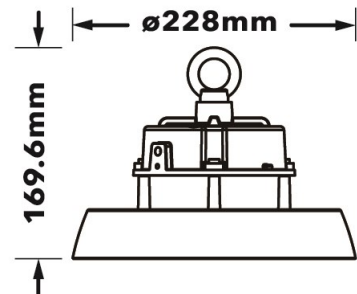

Order Code 66530

Geometric Data

Height (mm)	169.6 mm
Diameter (mm)	Φ228 mm
Weight (g)	1960g

Electric Data

Wattage	100W
Voltage	200-240V
Power Factor	>0.9
Operating Frequency	50/60 Hz

Photometric Data

Total Luminous Flux (lm)	15000
CRI	>80
CCT	5000K – Daylight
Luminous Intensity (cd)	5500 Cd
Beam Angle (°)	110°
No. of LED Chips	320

Equivalent to (W)

N.A.





Order Code	66530
Product Description	LED IP65 UFO highbay 100W 5000K Daylight 15000lm 220-240V 1-10V dimmable

Technical Packaging Details

Giftbox Barcode	4895117965306
Inner Carton Barcode	N/A
Outer Carton Barcode	N/A
Pack Dimensions (LxWxH)	290x290x195 mm
Pack Weight	2450g
Carton Qty (Shipping Unit)	1
Carton Dimensions (LxWxH)	290x290x195 mm
Cartons/Layer	N/A
Layers/Pallet	N/A
Units/Pallet	N/A

Accessories:
(Optional; Sold Separately)

Sensor	Remote
--------	--------



PN# 66533



PN# 66534