
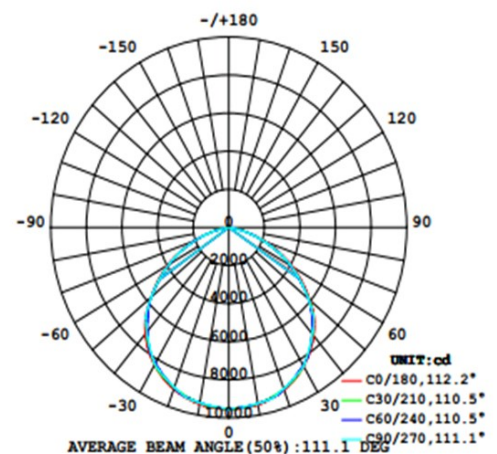


- 200W; 30000lm
- 150lm/W
- 110° beam angle
- Separate chamber for LED driver for better dissipation
- Dimmable (1-10V)
- -20°C to 45°C operating temperature
- IP65 waterproof
- IK10 impact protection
- Easy to install remote control microwave sensor (Sold Separately)
- L70 LED Lifetime >54000hrs

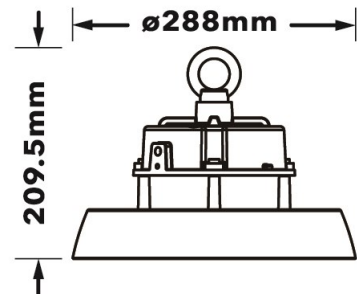

Order Code 66532

**Geometric Data**

Height (mm)	209.5 mm
Diameter (mm)	Φ288 mm
Weight (g)	2900g

**Electric Data**

Wattage	200W
Voltage	200-240V
Power Factor	>0.9
Operating Frequency	50/60 Hz

**Photometric Data**

Total Luminous Flux (lm)	30000
CRI	>80
CCT	5000K – Daylight
Luminous Intensity (cd)	10500 Cd
Beam Angle (°)	110°
No. of LED Chips	588

**Equivalent to (W)**

N.A.





<b>Order Code</b>	66532
<b>Product Description</b>	LED IP65 UFO highbay 200W 5000K Daylight 30000lm 220-240V 1-10V dimmable

**Technical Packaging Details**

Giftbox Barcode	4895117965320
Inner Carton Barcode	N/A
Outer Carton Barcode	N/A
Pack Dimensions (LxWxH)	345x345x225 mm
Pack Weight	3650g
Carton Qty (Shipping Unit)	1
Carton Dimensions (LxWxH)	345x345x225 mm
Cartons/Layer	N/A
Layers/Pallet	N/A
Units/Pallet	N/A

Accessories:  
(Optional; Sold Separately)

Sensor	Remote
--------	--------



PN# 66533



PN# 66534